HYDROTAP G5 BCSHA CELSIUS PLUS ALL-IN-ONE GUNMETAL

BOILING CHILLED SPARKLING HOT & AMBIENT

FILTERED UNFILTERED

Order Code H5M783Z09AU

Zip HydroTap Design Range CELSIUS PLUS All-In-One Boiling, Chilled & Sparkling Filtered water, plus Hot and Cold washing up water from a single tap (hot and cold water supply required). The intuitive touch-pad with antimicrobial protection operates the filtered drinking water, while the lever dispenses unfiltered hot and cold water. Enhanced sparkling water delivery every time with an optimised aerator hidden inside the elegant spout of the tap. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.

This product is available from selected specialist retailers. Click the "Find your Specialist Retailer" link to find your local showroom.

Manufacturing Code	H5M783Z09AU
Capacity	Residential

Tap	Zip HydroTap Design Range CELSIUS PLUS All-In-One (Gunmetal)
Water Pressure	Min 250kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold and Hot
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.8kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W339mm x D483mm x H333mm
Product Approvals	WaterMark, RCM, ARC
Wels Rating	5 Star, 6.0 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.

2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.

3. Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.

4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.

5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.

6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Installation Detail

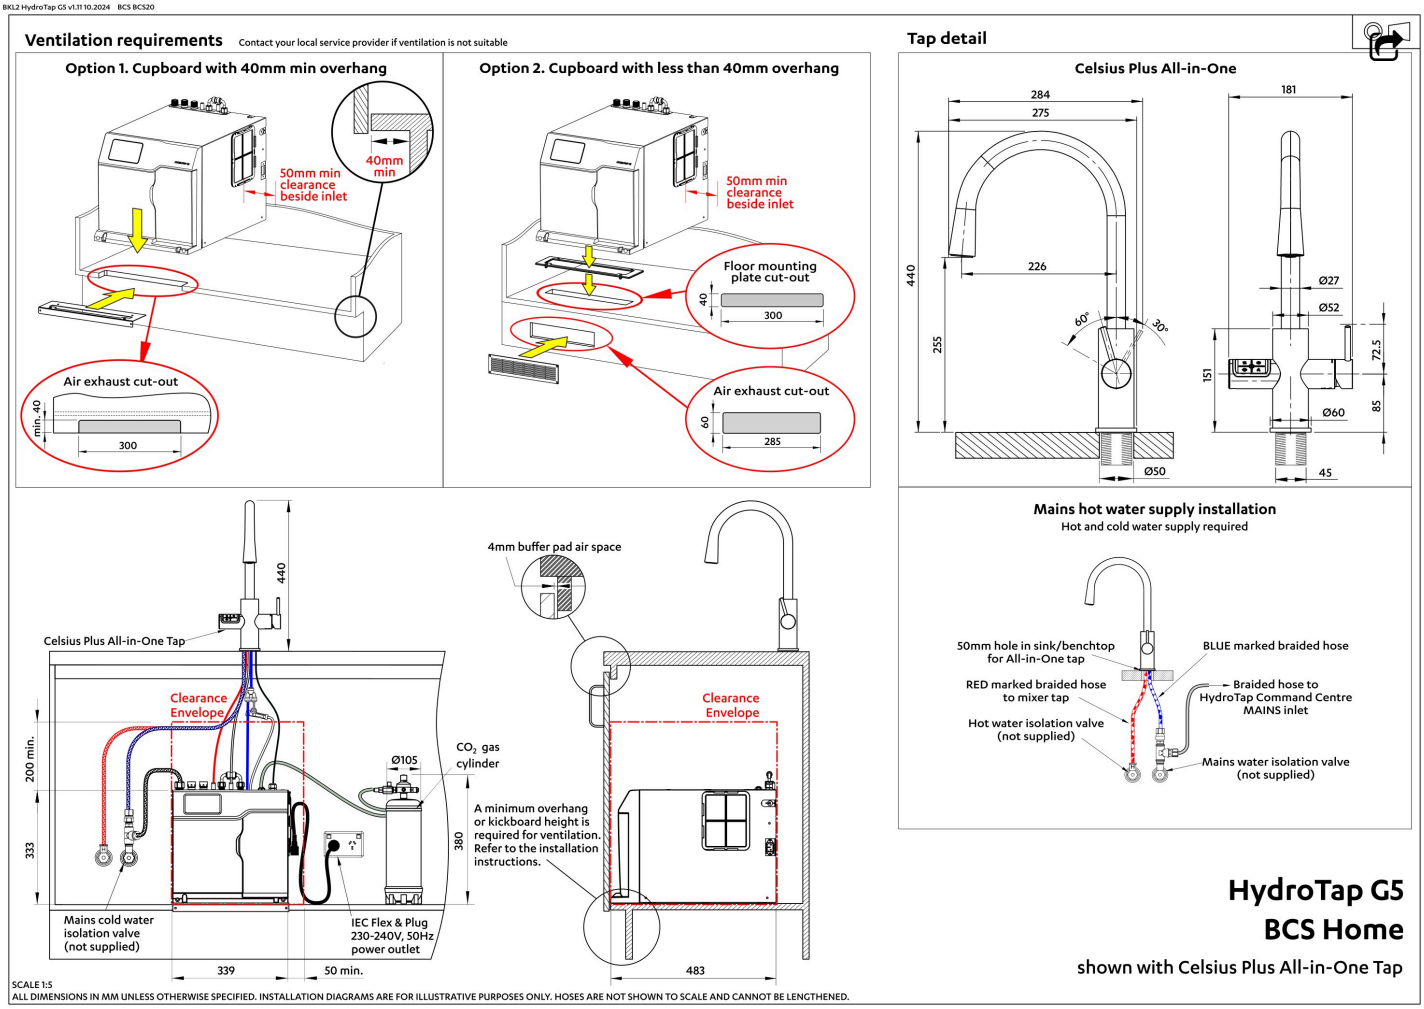
BKL2 HydroTap G5 v1.11 10.2024 BCS BCS20
Ventilation requirements
Contact your local service provider if ventilation is not suitable
Option 1. Cupboard with 40mm min overhang
50mm min clearance beside inlet
40mm min
Air exhaust cut-out
min. 40
300
Option 2. Cupboard with less than 40mm overhang
50mm min clearance beside inlet
Floor mounting plate cut-out
40
300
Air exhaust cut-out
60
285
Tap detail
Celsius Plus All-in-One
284
275
181
440
226
255
60°
30°
Ø27
Ø52
151
72.5
85
Ø60
Ø50
45
Mains hot water supply installation
Hot and cold water supply required
50mm hole in sink/benchtop for All-in-One tap
RED marked braided hose to mixer tap
Hot water isolation valve (not supplied)
BLUE marked braided hose
Braided hose to HydroTap Command Centre MAINS inlet
Mains water isolation valve (not supplied)
440
Celsius Plus All-in-One Tap
Clearance Envelope
200 min.
333
Ø105
CO2 gas cylinder
380
Mains cold water isolation valve (not supplied)
IEC Flex & Plug 230-240V, 50Hz power outlet
339
50 min.
4mm buffer pad air space
Clearance Envelope
A minimum overhang or kickboard height is required for ventilation. Refer to the installation instructions.
483
SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.
HydroTap G5
BCS Home
shown with Celsius Plus All-in-One Tap

Tap Detail

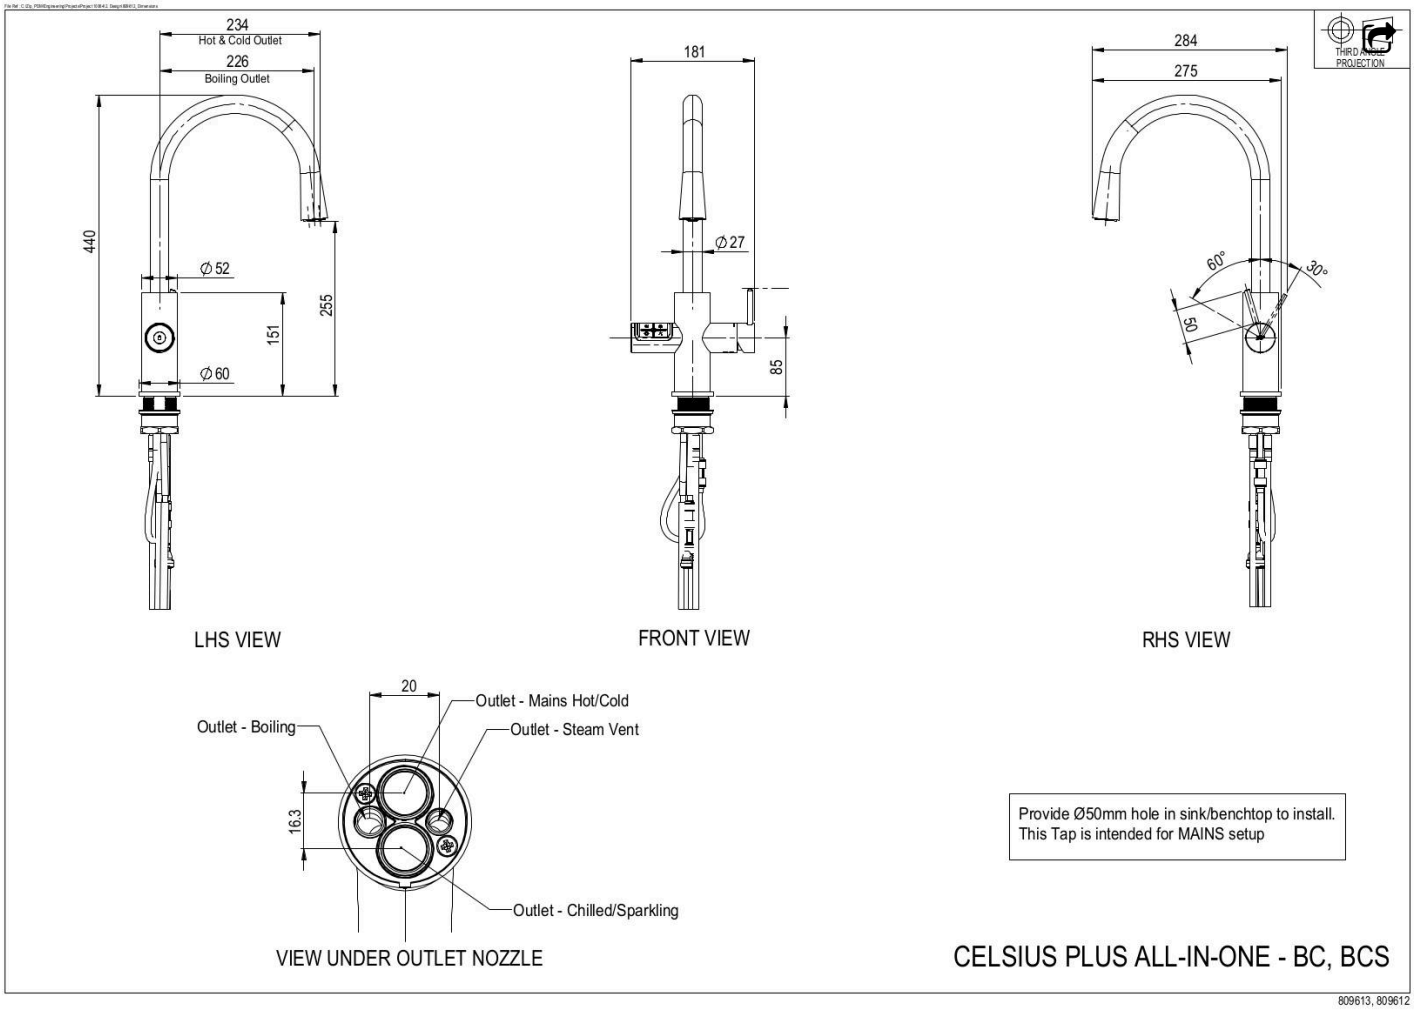
234
Hot & Cold Outlet
226
Boiling Outlet
440
Ø52
151
255
Ø60
LHS VIEW
181
Ø27
85
FRONT VIEW
284
275
THIRD ANGLE PROJECTION
60°
30°
60
RHS VIEW
20
Outlet - Boiling
Outlet - Mains Hot/Cold
Outlet - Steam Vent
16.3
Outlet - Chilled/Sparkling
VIEW UNDER OUTLET NOZZLE
Provide Ø50mm hole in sink/benchtop to install.
This Tap is intended for MAINS setup
CELSIUS PLUS ALL-IN-ONE - BC, BCS
809613, 809612