



HYDROTAP G5 B ARC PLUS BRUSHED GOLD




BOILING

FILTERED

Order Code H5L786Z07AU

Zip HydroTap Design Range Boiling, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, and 0.2 micron water filtration.

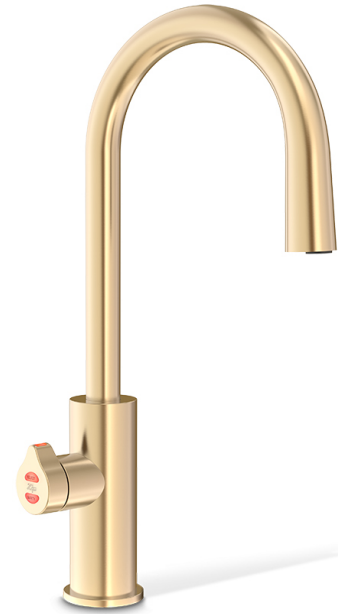

Manufacturing Code H5L786Z07AU

Capacity Residential

Tap	Zip HydroTap Design Range ARC Plus Tap (Brushed Gold)
Water Pressure	Min 170kPa - Max 700kPa
Water Connection	1/2" BSP (G1/2)
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	1.35kW 220-240V 50Hz
Power Supply	1 x 10 Amp socket outlet
Dimensions	W280mm x D313mm x H333mm
Product Approvals	WaterMark, RCM
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
3. Zip Micro is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Installation Detail

BKL2 HydroTap G5 v1.10 07.04 B, BA

Ventilation requirements Contact your local service provider if ventilation is not suitable

Clearance envelope
Position the Tap and the Command Centre as close together as possible.

200
333
50
Command Centre width

Air outlet louvre (if required)
Cut-out in door/wall, towards the top of the cabinet

Air inlet cut-out (required)
Cut-out in cabinet floor

max. 43
285
60
326

HydroTap Tap options

HydroTap Arc Plus Tap

30 162 232 134 387 87 54

HydroTap Cube Plus Tap

30 162 237 134 348 87 54

Standalone Font with Arc Plus Tap

162 232 230 174 387 54 140 176

Cutting detail
for HydroTap Arc/Cube

3-off, 10 holes @ 155mm PCD, equispaced
140 hole for bowl
176 outline of Font
174 for HydroTap Arc/Cube
35 hole for tap

Tap Positioning
Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount on a Font (available as an accessory).

Ø35mm hole for HydroTap Plus Tap

HydroTap Arc Plus

4mm buffer pad air space

200 min.
333
50 min.
280
50 min.
Mains cold water isolation valve (not supplied)
Air inlet grille IEC Flex & Plug 230-240V, 50Hz power outlet

313

4mm buffer pad air space

HydroTap G5
B Home, B60, B100
BA Home, BA60, BA100
shown with HydroTap Arc Plus

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.