

N 90, BUILT-IN OVEN WITH ADDED STEAM FUNCTION, 60 X 60 CM, FLEX DESIGN B69VS73Y0A



Z11AU15A0 Universal pan, non-stick ceramic coated, Z12CM10A0 Moussaka pan, enamelled, Z1365WX0 Wireless food thermometer, Z13CR10X0 Baking and roasting grid (steam), Z13CV06S0 Decor strip, Z1608CX0 Full ext rails, level independent, pyro, Z1655CA0 Air Fry & Grill tray, Z166CAX0 SC FlexDesign mounting kit, Z1913X0 Baking Stone, Z9060AY0 (SC)FlexDesign AG 60 Oven 60, Z9060BY0 (SC)FlexDesign BB 60 Oven 60, Z9060DY0 (SC)FlexDesign DB 60 Oven 60, Z9060MY0 (SC)FlexDesign MS 60 Oven 60, Z9075AY0 SC FlexDesign AG 75 WD 14 + 60, Z9075BY0 SC FlexDesign BB 75 WD 14 + 60, Z9075DY0 SC FlexDesign DB 75 WD 14 + 60, Z9075MY0 SC FlexDesign MS 75 WD 14 + 60, Z9098AY0 SC FlexDesign AG 98 60 + MW 38, Z9098BY0 SC FlexDesign BB 98 60 + MW 38, Z9098DY0 SC FlexDesign DB 98 60 + MW 38, Z9098MY0 SC FlexDesign MS 98 60 + MW 38, Z9105AY0 SC FlexDesign AG 105 60 + 45, Z9105BY0 SC FlexDesign BB 105 60 + 45, Z9105DY0 SC FlexDesign DB 105 60 + 45, Z9105MY0 SC FlexDesign MS 105 60 + 45, Z912AAY0 SC FlexDesign AG 120 WD14 + 60 + 45, Z912ABY0 SC FlexDesign BB 120 WD14 + 60 + 45, Z912ADY0 SC FlexDesign DB 120 WD14 + 60 + 45, Z912AMY0 SC FlexDesign MS 120 WD14 + 60 + 45, Z912BAY0 SC FlexDesign AG 120 60+60, Z912BBY0 SC FlexDesign BB 120 60+60, Z912BDY0 SC FlexDesign DB 120 60+60, Z912BMY0 SC FlexDesign MS 120 60+60, Z990AAY0 SC FlexDesign AG 90 WD 29 + 60, Z990ABY0 SC FlexDesign BB 90 WD 29 + 60, Z990ADY0 SC FlexDesign DB 90 WD 29 + 60, Z990AMY0 SC FlexDesign MS 90 WD 29 + 60

Z9060AY0 (SC)FlexDesign AG 60 Oven 60, Z9060BY0 (SC)FlexDesign BB 60 Oven 60, Z9060DY0 (SC)FlexDesign DB 60 Oven 60, Z9060MY0 (SC)FlexDesign MS 60 Oven 60, Z9075AY0 SC FlexDesign AG 75 WD 14 + 60, Z9075BY0 SC FlexDesign BB 75

Flex Design Slide & Hide® Oven with Vario Steam. Changeable design elements available in four different colours and Premium Full Touch TFT Display. Easy to handle door that gently disappears under the oven. Multipoint Meatprobe with forecast function. Home Connect - control your oven via the App.

- ✓ Added Steam - For food that's moist on the inside and crisp on the outside.
- ✓ Slide & Hide® - An easy to handle door that disappears under the oven for unrestricted access.
- ✓ Circo Therm - Our smart hot-air solution for simultaneous baking and roasting on up to four levels.
- ✓ 4,1" Full Touch TFT Display - Easy to use and intuitive menu for smart and enjoyable cooking.
- ✓ Multipoint Meatprobe - The three-point thermometer for delicious roasts done how you like!

Built-in / Free-standing: Built-in
Door opening: Drop down
Cleaning system: Pyrolytic + Easy Clean
Control Panel Material: Glass
Door Material: Glass
Dimensions (HxWxD): 595x596x548 mm
Dimensions of the packed product (HxWxD): 665x650x690 mm
Required niche size for installation (HxWxD): 585-595 x 560-568 x 550 mm
Cavity dimensions: 357.0 x 480 x 415.0 mm
Usable volume of cavity: 71 l
Net weight: 42.6 kg
Gross weight: 45.2 kg
EAN code: 4242004266372
Connection Rating: 3600 W
Fuse protection: 16 A
Voltage: 220-240 V
Frequency: 50; 60 Hz
Length electrical supply cord: 120 cm



4 242004 266372

WD 14 + 60, Z9075DY0 SC FlexDesign DB 75 WD 14 + 60,
Z9075MY0 SC FlexDesign MS 75 WD 14 + 60, Z9098AY0 SC
FlexDesign AG 98 60 + MW 38, Z9098BY0 SC FlexDesign BB 98 60
+ MW 38, Z9098DY0 SC FlexDesign DB 98 60 + MW 38, Z9098MY0
SC FlexDesign MS 98 60 + MW 38, Z9105AY0 SC FlexDesign AG
105 60 + 45, Z9105BY0 SC FlexDesign BB 105 60 + 45, Z9105DY0
SC FlexDesign DB 105 60 + 45, Z9105MY0 SC FlexDesign MS 105
60 + 45, Z912AAY0 SC FlexDesign AG 120 WD14 + 60 + 45,
Z912ABY0 SC FlexDesign BB 120 WD14 + 60 + 45, Z912ADY0 SC
FlexDesign DB 120 WD14 + 60 + 45, Z912AMY0 SC FlexDesign MS
120 WD14 + 60 + 45, Z912BAY0 SC FlexDesign AG 120 60+60,
Z912BBY0 SC FlexDesign BB 120 60+60, Z912BDY0 SC FlexDesign
DB 120 60+60, Z912BMY0 SC FlexDesign MS 120 60+60,
Z990AAY0 SC FlexDesign AG 90 WD 29 + 60, Z990ABY0 SC
FlexDesign BB 90 WD 29 + 60, Z990ADY0 SC FlexDesign DB 90
WD 29 + 60, Z990AMY0 SC FlexDesign MS 90 WD 29 + 60

N 90, BUILT-IN OVEN WITH ADDED STEAM FUNCTION, 60 X 60 CM, FLEX DESIGN B69VS73Y0A

Heating Functions

- Oven with 21 heating methods: CircoTherm®, Top/bottom heating, Circo-roasting, Full surface grill, Centre area grill, Pizza Setting, Bread Baking, Bottom heating, Low temperature cooking, Plate warming, Keep warm, CircoTherm® gentle, Top/bottom heating gentle, Air fry, Reheating, Dough Proving, Circo-roasting + steam, Bread Baking + steam, keep warm + steam, CircoTherm® + steam, Top/bottom heat + steam
- Temperature range 30 °C - 275 °C
- Cavity volume: 71 net usable litres

Racks and Rails

- Number of shelf levels: 4
- Large capacity oven with shelf supports, Telescopic shelf rails available as optional accessory, Pyrolytic proof

Design

- Flex Design (available in four colours)
- ShiftControl
- Cavity inner surface: enamel

Cleaning

- Pyrolytic self cleaning
- EasyClean® program
- Full glass inner door - safer touch door

Convenience

- Cooking Assistant
- 4.1" Full Touch TFT Display
- Electronic clock with start / stop function
- Automatic temperature proposal, Actual temperature display, Optical temperature control, Meat probe function
- Hide®, the fully retracting oven door
- Slide®, the revolving handle
- Oven door with Soft Close, SoftOpen
- Automatic Meal Settings
- Multipoint Meatprobe
- Rapid heat-up
- Steam Jet - add for 3min intensive steam with a touch of a button.
- There are different steam intensities selectable: steam level high, steam level middle, steam level low
- LED light
- Water tank empty indicator
- Location of the steam generator is outside of the cavity
- Cooling fan
- Stainless-steel fan
- HomeConnect

Accessories

- 1 x air fry & grill tray, 2 x combination grid, 1 x universal pan

Safety Features

- Maximum door temperature 30° C
- Quadruple glazed CoolTouch door

- Automatic door lock during pyrolysis, Individual adjustable child lock, Safety switch off, Residual heat indicator, Start button, Door contact switch




Technical Information

- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A+ (at a range of energy efficiency classes from A+++ to D)
- Energy consumption per cycle in conventional mode: 0.87 kWh
- Energy consumption per cycle in fan-forced convection mode: 0.69 kWh
- Number of cavities: 1
- Heat source: electrical
- Cavity volume: 71 net usable litres


Dimensions

- Appliance dimensions (HxWxD): 595 mm x 596 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing


*N 90, BUILT-IN OVEN WITH ADDED STEAM
FUNCTION, 60 X 60 CM, FLEX DESIGN
B69VS73Y0A*

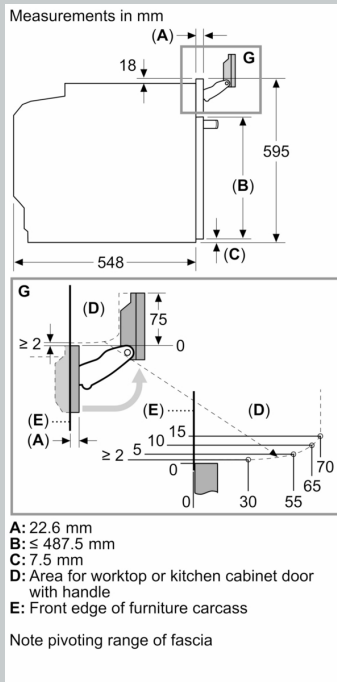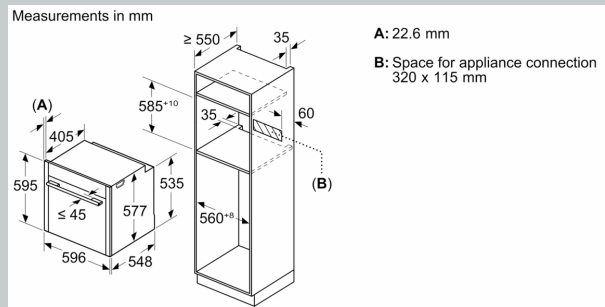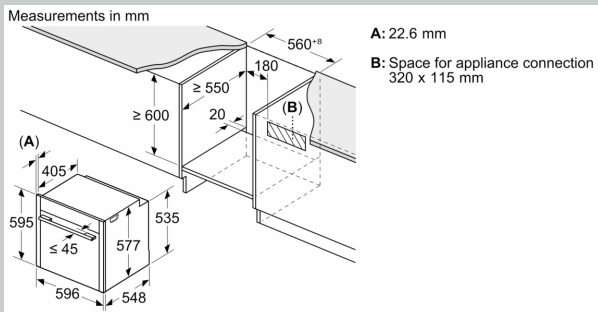

**Installing two appliances on top of each other
Air exchange**

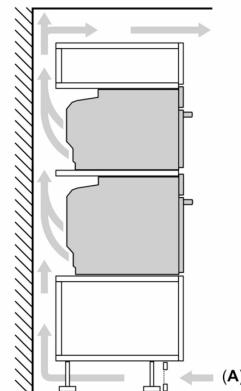

A: Air inlet ≥ 200 cm²

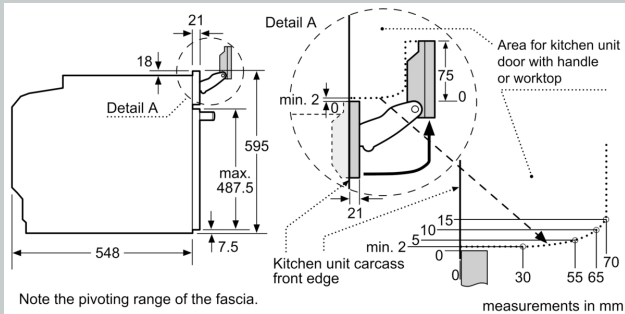

Measurements in mm
Worktop thickness when installing underneath a hob
(incl. substructure, if required)

Hob type	raised	flush
Induction hob	≥ 37	≥ 38
Full surface induction hob	≥ 47	≥ 48
Gas hob	≥ 30	≥ 38
Electric hob	≥ 27	≥ 30