

N 90, STEAM DRAWER, 59 X 14 CM, FLEX DESIGN N19DJ01Y0



1 x sponge, 1 x steam basket

Z1365WX0 Wireless food thermometer, Z9014AY0 Flex Design AG 14 AD/WD/SD 14, Z9014BY0 FlexDesign BB 14 WD/SD 14, Z9014DY0 FlexDesign DB 14 WD/SD 14, Z9014MY0 FlexDesign MS 14 WD/SD 14, Z9060AY0 (SC)FlexDesign AG 60 Oven 60, Z9060BY0 (SC)FlexDesign BB 60 Oven 60, Z9060DY0 (SC)FlexDesign DB 60 Oven 60, Z9060MY0 (SC)FlexDesign MS 60 Oven 60, Z9075AY0 SC FlexDesign AG 75 WD 14 + 60, Z9075BY0 SC FlexDesign BB 75 WD 14 + 60, Z9075DY0 SC FlexDesign DB 75 WD 14 + 60, Z9075MY0 SC FlexDesign MS 75 WD 14 + 60, Z9098AY0 SC FlexDesign AG 98 60 + MW 38, Z9098BY0 SC FlexDesign BB 98 60 + MW 38, Z9098DY0 SC FlexDesign DB 98 60 + MW 38, Z9098MY0 SC FlexDesign MS 98 60 + MW 38, Z9105AY0 SC FlexDesign AG 105 60 + 45, Z9105BY0 SC FlexDesign BB 105 60 + 45, Z9105DY0 SC FlexDesign DB 105 60 + 45, Z9105MY0 SC FlexDesign MS 105 60 + 45, Z912AAY0 SC FlexDesign AG 120 WD14 + 60 + 45, Z912ABY0 SC FlexDesign BB 120 WD14 + 60 + 45, Z912ADY0 SC FlexDesign DB 120 WD14 + 60 + 45, Z912AMY0 SC FlexDesign MS 120 WD14 + 60 + 45, Z912BAY0 SC FlexDesign AG 120 60+60, Z912BBY0 SC FlexDesign BB 120 60+60, Z912BDY0 SC FlexDesign DB 120 60+60, Z912BMY0 SC FlexDesign MS 120 60+60, Z990AAY0 SC FlexDesign AG 90 WD 29 + 60, Z990ABY0 SC FlexDesign BB 90 WD 29 + 60, Z990ADY0 SC FlexDesign DB 90 WD 29 + 60, Z990AMY0 SC FlexDesign MS 90 WD 29 + 60

Z9014AY0 Flex Design AG 14 AD/WD/SD 14, Z9014BY0 FlexDesign BB 14 WD/SD 14, Z9014DY0 FlexDesign DB 14 WD/SD 14, Z9014MY0 FlexDesign MS 14 WD/SD 14, Z9060AY0 (SC)FlexDesign AG 60 Oven 60, Z9060BY0 (SC)FlexDesign BB 60 Oven 60, Z9060DY0 (SC)FlexDesign DB 60 Oven 60, Z9060MY0 (SC)FlexDesign MS 60 Oven 60, Z9075AY0 SC FlexDesign AG 75 WD 14 + 60, Z9075BY0 SC FlexDesign BB 75 WD 14 + 60, Z9075DY0 SC FlexDesign DB 75 WD 14 + 60, Z9075MY0 SC FlexDesign MS 75 WD 14 + 60, Z9098AY0 SC FlexDesign AG 98 60 + MW 38, Z9098BY0 SC FlexDesign BB 98 60 + MW 38, Z9098DY0 SC FlexDesign DB 98 60 + MW 38, Z9098MY0 SC FlexDesign MS 98 60 + MW 38, Z9105AY0 SC FlexDesign AG 105 60 + 45, Z9105BY0 SC FlexDesign BB 105 60 + 45, Z9105DY0 SC FlexDesign DB 105 60 + 45, Z9105MY0 SC FlexDesign MS 105 60 + 45, Z912AAY0 SC

The built-in steamer in a space-saving, flexible drawer fitting seamlessly even into smaller kitchen; steaming keeps dishes full of flavour, nutrients and natural colour. Also for reheating food leftovers, dough proving, defrosting and disinfection.

- ✓ Steam Drawer: Space-saving steamer in a drawer design, ideal for smaller kitchens with flexible installation options.
- ✓ Steam cooking functions: Versatile applications for gentle, flavourful and healthy cooking.
- ✓ Automatic Meal Settings: Easy cooking with preselected automatic programmes.
- ✓ Easy Cleaning: Enjoy hassle-free cleaning and automatic descaling reminders for lasting performance.
- ✓ Seamless Combination with Flex Design - Watch your favourite appliances blend together seamlessly.

Plug type: Standard 10 Amp plug
Frequency: 50-60 Hz
Voltage: 220-240 V
Fuse protection: 10 A
Connection Rating: 1700 W
EAN code: 4242004288213
Length electrical supply cord: 120 cm
Net weight: 23.1 kg
Door Material: Glass
Control Panel Material: Glass
Dimensions of the packed product (HxWxD): 260x660x665 mm
Dimensions (HxWxD): 141x594x518 mm
Required niche size for installation (HxWxD): 144-144 x 560-568 x 550 mm
Color / Material Front: Black
Included accessories: 1 x sponge, 1 x steam basket



FlexDesign AG 120 WD14 + 60 + 45, Z912ABY0 SC FlexDesign BB
120 WD14 + 60 + 45, Z912ADY0 SC FlexDesign DB 120 WD14 +
60 + 45, Z912AMY0 SC FlexDesign MS 120 WD14 + 60 + 45,
Z912BAY0 SC FlexDesign AG 120 60+60, Z912BBY0 SC FlexDesign
BB 120 60+60, Z912BDY0 SC FlexDesign DB 120 60+60,
Z912BMY0 SC FlexDesign MS 120 60+60, Z990AAY0 SC
FlexDesign AG 90 WD 29 + 60, Z990ABY0 SC FlexDesign BB 90
WD 29 + 60, Z990ADY0 SC FlexDesign DB 90 WD 29 + 60,
Z990AMY0 SC FlexDesign MS 90 WD 29 + 60

*N 90, STEAM DRAWER, 59 X 14 CM, FLEX DESIGN
N19DJ01Y0*

Type of appliance / heating system:

- Temperature range 30 °C - 100 °C
- Steam Drawer with 5 heating methods: FullSteam, Reheating, Dough Proving, Defrost setting, disinfection

Design

- Flex Design (available in four colours)
- stainless steel cavity
- Appliance colour: black

Cleaning

- Descaling program
- Descaling duration: 32 min
- Easy to clean stainless steel cavity

Convenience

- LED-display control
- 10 automatic programs
- Additional automatic programmes via Home Connect
- Cavity volume: 10 l
- Glas Lid with resting position
- Watertank volume: 0.5 l
- Water tank empty indicator
- Time Indicator on the frontpanel
- Location of steam generator is inside of the cavity

Accessories

- 1 x sponge, 1 x steam basket

Safety Features

- Individual adjustable child lock, Start button, Door contact switch
- Child Lock via Home Connect
- Cooling fan

Technical Information


- Length of mains cable: 120 cm
- Total connected load electric: 1.7 KW
- Nominal voltage: 220 - 240 V

Dimensions

- Appliance dimensions (HxWxD): 141 mm x 594 mm x 518 mm
- Please reference the built-in dimensions provided in the installation drawing
- This Drawer is suitable to all: Neff N70 and all N90 appliances.


N 90, STEAM DRAWER, 59 X 14 CM, FLEX DESIGN
N19DJ01Y0

Measurements in mm

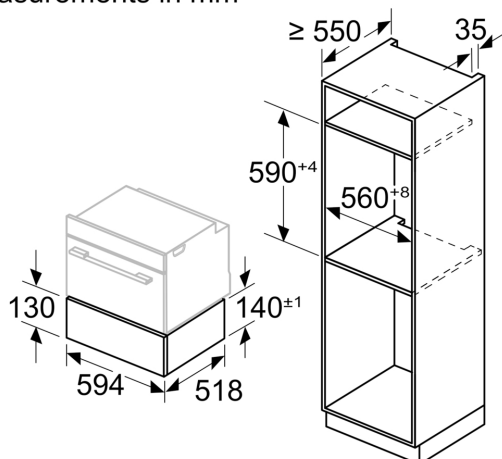


For the combined installation of some electrical appliances, the appliances could be directly stacked on the drawer


Measurements in mm

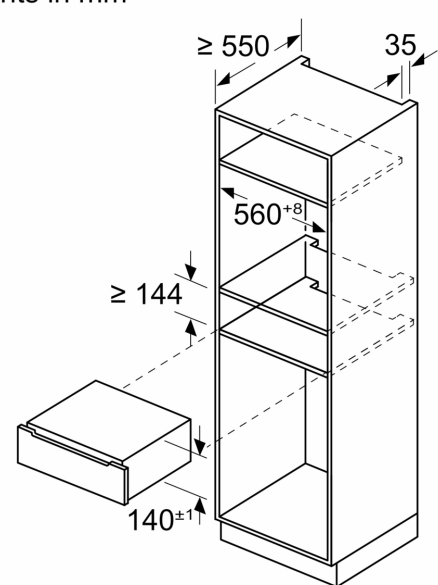


Measurements in mm

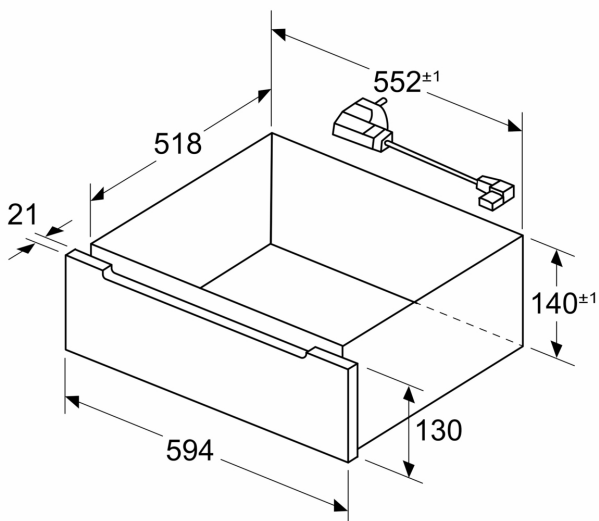

Measurements in mm

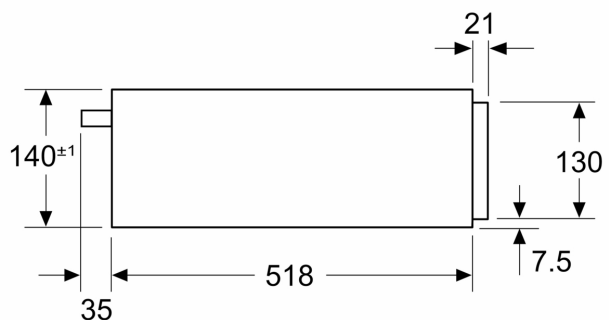

Measurements in mm
Installation below a worktop



Observe the installation dimensions and the installation instructions when installing below a worktop

A: Electrical connection


Note:

A worktop overhang of up to 50 mm over the drawer is possible, but then the removal of the water tank while the steam drawer is operating is not possible

Measurements in mm
Installation underneath a hob

Observe the installation dimensions and the installation instructions when installing in the unit

If the appliance is installed under a hob, the following minimum dimensions must be adhered to (including substructure, if applicable)

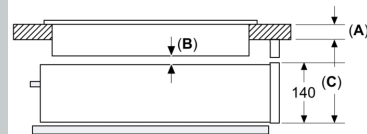

Tabletop installation or
flush installation

Tabletop installation or
flush installation

	A	B	C
Induction hob	30/30	5	200/201
Full surface induction hob	40/40	5	210/211
Gas hob	32/43	5	190/193
Electric hob	30/30	5	190/197

A: Thickness of work surface recommended in the hob installation instructions


B: Required distance between hob and steam drawer

C: Required distance between drawer shelf and bottom of worktop

Note:

Pay attention to the hob installation instructions

Measurements in mm
Installation on walls adjacent to a cabinet



Note:
If the walls on both sides of the cabinet are deeper than the cabinet, a distance of at least 110 mm must be maintained

Any distance smaller than this may affect installation of the appliance