

N 90, Built-in oven with steam function, 60 x 60 cm, Flex Design
B69FS5CY0A



Flex Design Slide & Hide® Oven with Full Steam. Changeable design elements available in four different colours and Premium Full Touch TFT Display. Easy to handle door that gently disappears under the oven and closes smoothly. Multipoint Meatprobe with forecast function. Home Connect - control your oven via the App.

- ✓ 4,1" Full Touch TFT Display - Easy to use and intuitive menu for smart and enjoyable cooking.
- ✓ Flex Design - Choose a finishing touch to match your kitchen's aesthetic – now and later!
- ✓ Seamless Combination with Flex Design - Watch your favourite appliances blend together seamlessly.
- ✓ Slide & Hide® - An easy to handle door that disappears under the oven for unrestricted access.
- ✓ Intensive Steam - Healthy steaming keeps your favourite dishes full of flavour and nutrients.

Features

Technical Data

Gross weight : 97.000 lbs
Built-in / Free-standing : Built-in
Door opening : Drop down
Min. required niche size for installation (HxWxD) : 585-595 x 560-568 x 550 mm
Dimensions (HxWxD) : 595 x 596 x 548 mm
Dimensions of the packed product (HxWxD) : 670 x 660 x 690 mm
Control Panel Material : Glass
Door Material : Glass
Net weight : 41.2 kg
Length electrical supply cord : 120.0 cm
Heating functions : 4D HotAir, Air fry, Bottom heat, Bread Baking Setting, Conventional heat, Conventional heat gentle, Defrost, Dough Proving, Full width grill, Half width grill, Hotair gentle, Hot Air grilling, Low temperature cooking, Pizza setting, Pre-heating, Pure steaming, Reheating, Sous-vide, Warming
Time-setting Options : Start and Stop
Fuse protection : 16 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Plug type : no plug
Energy input : Electric
Fuse protection : 16 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Plug type : no plug
Dimensions of the packed product : 26.37 x 25.98 x 27.16
Net weight : 91.000 lbs
Included accessories : 1 x grid, 1 x universal pan, 1 x steam container, punched, size XL, 1 x sponge, 1 x Steam container, punched, size M, 1 x Steam container, unpunched, size M, 1 x Air Fry & Grill tray

Optional accessories

Z11AB15A0 : , Z11AU15A0 : , Z11CG10X1 : , Z11GT10X3 : , Z11SZ00X1 : SC FlexDesign mounting kit , Z12CB10A0 : Baking tray, anthracite enamelled , Z12CL10A0 : , Z12CM10A0 : Moussaka pan, anthracite enamelled , Z12CN10A0 : , Z12CP10A0 : , Z12CU10A0 : Multipurpose pan, anthracite enamelled , Z13CR10X0 : , Z13CV06S0 : Decor strip , Z1608DX0 : Full ext rails, level independent, steam , Z1650BE0 : Half tray , Z1650DU0 : , Z1655CA0 : Air Fry & Grill tray , Z9060AY0 : (SC)FlexDesign AG 60 Oven 60 , Z9060BY0 : (SC)FlexDesign BB 60 Oven 60 , Z9060DY0 : (SC)FlexDesign DB 60 Oven 60 , Z9060MY0 : (SC)FlexDesign MS 60 Oven 60 , Z9075AY0 : SC FlexDesign AG 75 WD 14 + 60 , Z9075BY0 : SC FlexDesign BB 75 WD 14 + 60 , Z9075DY0 : SC FlexDesign DB 75 WD 14 + 60 , Z9075MY0 : SC FlexDesign MS 75 WD 14 + 60 , Z9098AY0 : SC FlexDesign AG 98 60 + MW 38 , Z9098BY0 : SC FlexDesign BB 98 60 + MW 38 , Z9098DY0 : SC FlexDesign DB 98 60 + MW 38 , Z9098MY0 : SC FlexDesign MS 98 60 + MW 38 , Z9105AY0 : SC FlexDesign AG 105 60 + 45 , Z9105BY0 : SC FlexDesign BB 105 60 + 45 , Z9105DY0 : SC FlexDesign DB 105 60 + 45 , Z9105MY0 : SC FlexDesign MS 105 60 + 45 , Z912AAY0 : SC FlexDesign AG 120 WD14 + 60 + 45 , Z912ABY0 : SC FlexDesign BB 120 WD14 + 60 + 45 , Z912ADY0 : SC FlexDesign DB 120 WD14 + 60 + 45 , Z912AMY0 : SC FlexDesign MS 120 WD14 + 60 + 45 , Z912BAY0 : SC FlexDesign AG 120 60+60 , Z912BBY0 : SC FlexDesign BB 120 60+60 , Z912BDY0 : SC FlexDesign DB 120 60+60 , Z912BMY0 : SC FlexDesign MS 120 60+60 , Z990AAY0 : SC FlexDesign AG 90 WD 29 + 60 , Z990ABY0 : SC FlexDesign BB 90 WD 29 + 60 , Z990ADY0 : SC FlexDesign DB 90 WD 29 + 60 , Z990AMY0 : SC FlexDesign MS 90 WD 29 + 60



4 242004 266327

*N 90, Built-in oven with steam function, 60 x 60
cm, Flex Design
B69FS5CY0A*

Features

Heating Functions

- Combi-steam oven with 24 heating methods: CircoTherm®, Top/bottom heating, Circo-roasting, Full surface grill, Centre area grill, Pizza Setting, Bread Baking, Bottom heating, Low temperature cooking, Plate warming, Keep warm, CircoTherm® gentle, Top/bottom heating gentle, Air fry, FullSteam, Reheating, Dough Proving, Defrost setting, Sous-vide cooking, Circo-roasting + steam, Bread Baking + steam, keep warm + steam, CircoTherm® + steam, Top/bottom heat + steam
- Temperature range 40 °C - 250 °C.
- Intensive Steam 120 °C
- Cavity volume: 71 net usable litres

Hook-in racks / rails

- Number of shelf levels: 4
- 1 set of level independent telescopic rails (Clip-on rail), full extension, safety stop function

Design

- Flex Design (available in four colours)
- ShiftControl
- Cavity inner surface: enamel

Cleaning

- Eco Clean: coating of ceiling, back panel, side liners
- EasyClean program
- Full glass inner door - safer touch door

Convenience

- Oven Assistant with Voice Control
- 4.1" Full Touch TFT Display
- Electronic clock with start / stop function
- Automatic temperature proposal, Actual temperature display, Optical temperature control, Meat probe function
- Hide®, the fully retracting oven door
- Slide®, the revolving handle
- Oven door with Soft Close, SoftOpen
- Automatic Meal Settings
- Multipoint Meatprobe
- Rapid heat-up
- Steam Jet - add for 3min intensive steam with a touch of a button.
- There are different steam intensities selectable: steam level high, steam level middle, steam level low
- LED light
- Water tank empty indicator
- Location of the steam generator is outside of the cavity
- Cooling fan
- Stainless-steel fan
- HomeConnect

Accessories

- 1 x Air Fry & Grill tray, 1 x Steam container, punched, size M, 1 x Steam container, unpunched, size M, 1 x grid, 1 x sponge, 1 x steam container, punched, size XL, 1 x universal pan

Safety and Environment

- Low door temperature
- Triple glazed door
- Individual adjustable child lock, Safety switch off, Residual heat indicator, Start button, Door contact switch

Technical Info




- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW

Dimensions

- Appliance dimensions (HxWxD): 595 mm x 596 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

N 90, Built-in oven with steam function, 60 x 60
cm, Flex Design
B69FS5CY0A


Dimensioned drawings

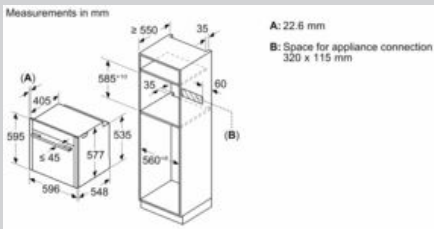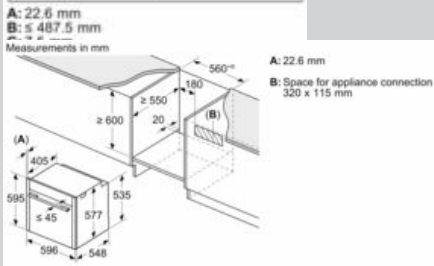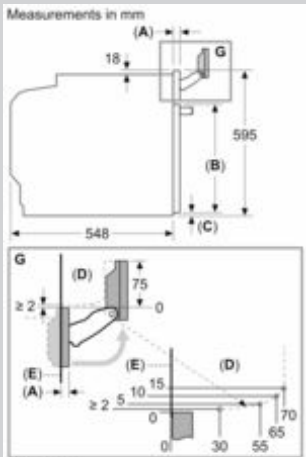

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

Installing two appliances on top of each other
Air exchange

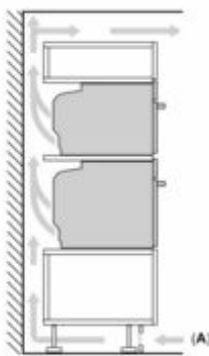

A: Air inlet ≥ 200 cm²