

**Series 2, free-standing dishwasher,
60 cm, Brushed steel anti-fingerprint
SMS26AI03A**



- **Auto Program:** Automatically the best cleaning performance.
- **EcoSilence Drive:** Especially energy-saving and silent in operation with a particularly high life span.
- **Dosage Assist:** Allows the tablet to dissolve steadily, ensuring spotless dishes without leftovers.
- **AquaStop:** The safety net against water damages. A warranty through the lifetime of the dishwasher.
- **Extra Dry:** Selectable option for additional drying.

Technical Data

Water consumption : 13.5 l
Built-in / Free-standing : Freestanding
Height of removable worktop : 30 mm
Depth with open door 90 degree : 1155 mm
Adjustable feet : Yes - all
Maximum adjustability feet : 20 mm
Adjustable plinth : Adjustable plinth
Net weight : 45.1 kg
Gross weight : 46.3 kg
Connection Rating : 2400 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Length electrical supply cord : 175 cm
Plug type : AU plug
Length inlet hose : 165 cm
Length outlet hose : 190 cm
EAN code : 4242005580217
Number of place settings : 13
Energy efficiency rating : Not applicable
Reference programme : Eco
Total cycle time of reference programme : 140 min
Noise level : 50 dB(A) re 1pW
Installation type : Free-standing with built under possibility



Series 2, free-standing dishwasher, 60 cm, Brushed steel anti-fingerprint SMS26AI03A

Capacity

- Capacity: 13 place settings

Consumption rates

- 3 Star energy rating, 3.5 Star water rating.
- Water consumption of 13.5 litres per wash using Eco in accordance with AS/NZS 6400 and Energy consumption of 305 kWh per year using the Eco program seven times per week. Consumption is based on cold water connection and is tested in accordance with AS/NZS 2007.2
- 13.5 l water consumption per wash based on Cold water connection, using Eco Wash program. In accordance with AS/NZS 6400
- Consumption test program: Eco 50°C

Design

- AquaSensor™ technology: Regulates the water usage depending on the type and degree of soiling
- DosageAssist™: Maximises the effectiveness of detergent tablets. The tablet is dropped into a specially engineered tray and is completely dissolved. For superior cleaning performance and a quieter wash.
- EcoSilence Drive® quiet and energy-efficient brushless motor (BLDC)
BLDC Main Pump: Variable water & spray pressure to achieve optimum cleaning results
BLDC Drain Pump: Fast and extra quiet draining of water, no gargling sounds
- 5 Spray levels for maximum water contact and optimum wash results
- Polinox inner tub: The Polinox inner tub is extremely durable, odourless and rust-free. German engineered with robust materials that withstand dints, scratches and discolouration, based on 10 year simulation tests.

Wash Programs and Options

- 6 programmes:
Eco Wash : Energy efficient wash & dry. Mixed loads & soil levels 45 °C,
Auto Wash: automatic wash & dry for Mixed loads & soil levels 45-65 °C,
Pots and Pans : For heavily soiled dishes 70 °C,
Quick 1hr : Quick wash & dry. Mixed loads & soil levels. 65 °C,
Express Wash 45 °C,
- Pre-Rinse: Rinse cycle only.
- 3 special options:
Extra Dry,
- HalfLoad: For half loads, reduces energy, water & time.,
SpeedPerfect
- Machine Care

Performance

- Very quiet operation: 50 dB
- 3 stage self-cleaning filter system: design that helps reduce the need to wash the filter and prevents blockages

Convenience

- Anti-fingerprint stainless steel finish
- Low friction wheels on bottom basket
- Rack Stopper to prevent derailing of bottom basket
- Time remaining display
- Time delay start: Delay program start time by 1-24 hours to suit your schedule

Safety

- AquaStop™ Plus: Water supply device with lifetime anti-flood protection

Flexibility

- Cutlery basket in bottom basket
- 2 foldable cup shelves in top basket
- Glass holder in top basket


Product Dimensions (H x W x D)

- H: 845 x W: 600 mm x D: 600 mm

2 year warranty <https://www.bosch-home.com.au/metapages/warranty>

**Series 2, free-standing dishwasher, 60 cm,
Brushed steel anti-fingerprint
SMS26AI03A**

measurements in mm

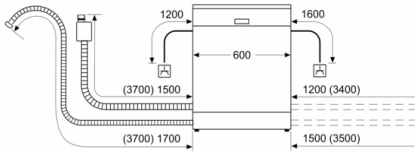

socket
() values with extension kit