

## KFN 4776 ED



- Spacious drawer with moisture control – DailyFresh
- Two separate air circuits for optimum cooling – DuplexCool
- Uniform temperature distribution inside the appliance – DynaCool
- No icing up of food and no need to defrost thanks to NoFrost
- Soft closing of the door with SoftClose


<b>Appliance category</b>	
Fridge-freezer	•
<b>Construction type</b>	
Freestanding appliance	•
Door hinge	Right
Convertible door hinging	•
<b>Design</b>	
Casing colour	Silver
Front colour	CleanSteel
Refrigeration section lighting	LED
<b>User convenience</b>	
Networking with Miele@home	•
Freshness system	DailyFresh
ComfortClean	•
DynaCool	•
NoFrost	•
DuplexCool	•
XL interior	•
VarioRoom	•
SoftClose	•
Handle design	EasyOpen lever handle
<b>Controls</b>	
Controls	SensorTouch
Precise adjustment	Fridge and freezer temperature
Fridge compartment can be switched off	Yes
Independent temperature regulation of fridge and freezer zones	Yes
SuperCool	•
SuperFreeze	•
No. of temperature zones	2
Sabbath mode	•
Party mode	•
Holiday mode	•
<b>Fridge/Fridge section</b>	
No. of shelves	3
Including number of split shelves (FlexiBoard)	1
Chrome-plated metal bottle rack	•
No. of crisper drawers	1
No. of door shelves for tinned food	2
Door shelves for bottles	1
Door shelves	3
<b>Freezer/Freezer section</b>	
Number of freezer drawers	3
<b>Safety</b>	
Lock function	•
Acoustic door alarm	•
Acoustic temperature alarm	•
Optical door alarm	•
Optical temperature alarm	•
Power cut indication for freezer section	•

KFN 4776 ED




Technical data	
Appliance width in mm	747
Appliance height in mm	1850
Appliance depth in mm	675
Weight in kg	450
Energy rating	5.5
Usable capacity in l - Fridge	295
Usable capacity in l - Freezer	138
Current consumption (mA)	1400
Voltage in V	220-240
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50-60
Length of supply lead in m	2.0
Accessories supplied	
Egg tray	•
Ice cube tray	•

## KFN 4776 ED Installation diagrams

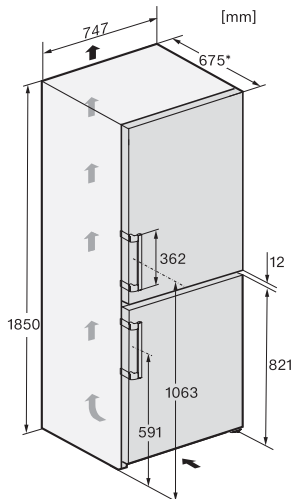


KFN4776ED sketch (footnote\*)  
(installation drawings)

\*To achieve the declared energy consumption, the spacers supplied with the unit must be used. This increases the depth of the unit by approx. 15 mm. The unit is fully functional without the use of the spacers, but has a slightly higher energy consumption.

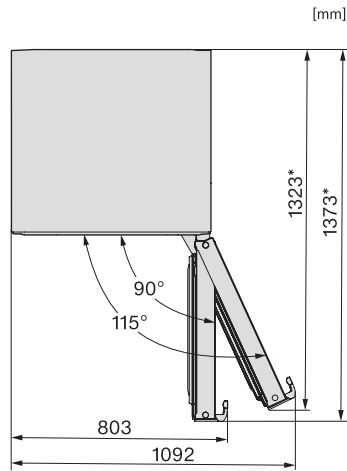

KFN4776ED top view (\*footnote)  
(installation drawings)

\*To achieve the declared energy consumption, the spacers supplied with the unit must be used. This increases the depth of the unit by approx. 15 mm. The unit is fully functional without the use of the spacers, but has a slightly higher energy consumption.

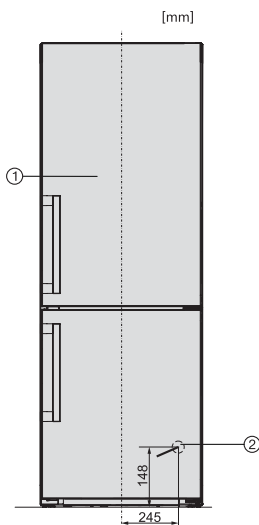

KFN4776ED, KFN4776ED C, installation  
(footnote\*) (installation drawings)

1. View from the front
2. Mains connection cable, L = 2000 mm

All dimensions are given in mm