



# HYDROTAP G5 B ELITE PLUS BRUSHED NICKEL



**BOILING**

**FILTERED**

## Order Code H5E786Z11AU

Zip HydroTap Design Range Boiling, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, and 0.2 micron water filtration.



Manufacturing Code H5E786Z11AU

Capacity Residential





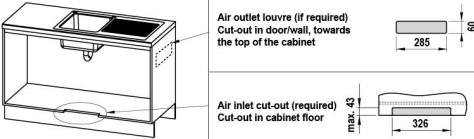



<b>Tap</b>	Zip HydroTap Design Range ELITE PLUS Tap (Brushed Nickel)
<b>Water Pressure</b>	Min 250kPa - Max 700kPa
<b>Water Connection</b>	1/2" BSP (G1/2)
<b>Water Supply Requirements</b>	Cold
<b>Water Valves</b>	Integrated 500kPa Pressure limiting valve and Dual Check Valve
<b>Power Rating</b>	1.35kW 220-240V 50Hz
<b>Power Supply</b>	1 x 10 Amp socket outlet
<b>Dimensions</b>	W280mm x D313mm x H333mm
<b>Product Approvals</b>	WaterMark, RCM, ARC
<b>Warranty</b>	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

# Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
3. Zip Micro is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com/book-service-visit](http://www.zipwater.com/book-service-visit)

## Installation Detail

BKL2 HydroTap G5 v1.00 02.21 B, BA

Ventilation requirements <small>Contact your local service provider if ventilation is not suitable</small>	HydroTap Tap options	Font options	
<p><b>Clearance envelope</b> Position the Tap and the Command Centre as close together as possible.</p>  <p>200 333 50 Command Centre width</p>	<p><b>Classic Plus</b>      <b>Elite Plus</b></p>  <p>116      110 216      221 126      135 ∅46      ∅46</p>	<p><b>Raised Font with 135mm Extension</b></p>  <p>116      ∅46 280      351 116      20 268</p> <p><b>Font with 135mm Extension</b></p>  <p>116      ∅46 280      351 104      6 ∅219</p>	
 <p>Air outlet louvre (if required) Cut-out in door/wall, towards the top of the cabinet</p> <p>Air inlet cut-out (required) Cut-out in cabinet floor</p> <p>285      80 max. 43      326</p>	<p><b>Tap Positioning</b> Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).</p> <p>∅35mm hole for HydroTap Tap</p>  <p>Sink</p> <p><b>Cutting detail</b></p>  <p>∅10 for M6 stud      ∅86 hole for bowl      ∅35 hole for tap 116      152 164</p> <p>∅108 hole for bowl      ∅35 hole for tap ∅10 for M6 stud      60      104      ∅219</p>		
 <p>4mm buffer pad air space</p> <p>Classic Plus Tap      216</p> <p>Clearance Envelope</p> <p>200 min. 333</p> <p>Mains cold water isolation valve (not supplied)      Air inlet grille      IEC Flex &amp; Plug 230-240V, 50Hz power outlet</p> <p>50 min.      280      50 min.      313</p> <p><b>HydroTap G5 B Home, BA Home</b> shown with "Classic Plus" Tap</p> <p>SCALE 1:5 ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.</p>			