



# HYDROTAP G5 B ELITE PLUS BRUSHED ROSE GOLD



**BOILING**

**FILTERED**

## Order Code H5E786Z05AU

Zip HydroTap Design Range Boiling, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, and 0.2 micron water filtration.



Manufacturing Code H5E786Z05AU

Capacity Residential

<b>Tap</b>	Zip HydroTap Design Range ELITE PLUS Tap (Brushed Rose Gold)
<b>Water Pressure</b>	Min 250kPa - Max 700kPa
<b>Water Connection</b>	1/2" BSP (G1/2)
<b>Water Supply Requirements</b>	Cold
<b>Water Valves</b>	Integrated 500kPa Pressure limiting valve and Dual Check Valve
<b>Power Rating</b>	1.35kW 220-240V 50Hz
<b>Power Supply</b>	1 x 10 Amp socket outlet
<b>Dimensions</b>	W280mm x D313mm x H333mm
<b>Product Approvals</b>	WaterMark, RCM, ARC

**Warranty**





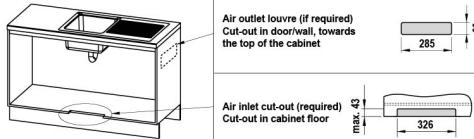

5 years (appliance warranty 36 months plus additional 24 months tank warranty)

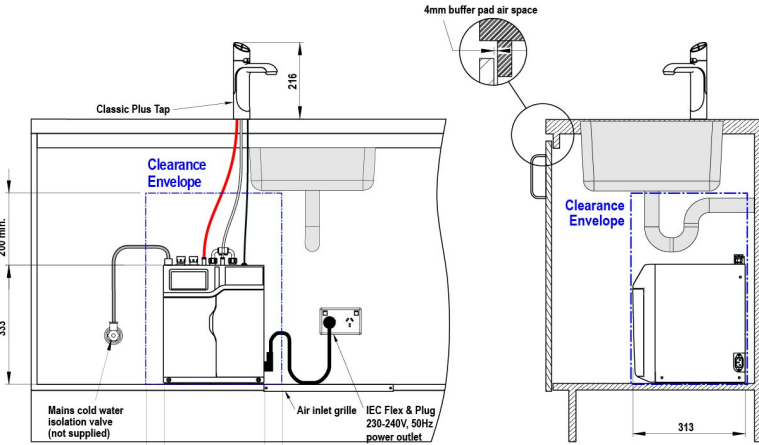
**Installation Requirements**

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
3. Zip Micro is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com/book-service-visit](http://www.zipwater.com/book-service-visit)

**Installation Detail**

DKL2 HydroTap G5 v1.00 02.21 B, BA

<p><b>Ventilation requirements</b> Contact your local service provider if ventilation is not suitable</p> <p><b>Clearance envelope</b> Position the Tap and the Command Centre as close together as possible.</p> 	<p><b>HydroTap Tap options</b></p> <p>Classic Plus Elite Plus</p> 	<p><b>Font options</b></p> <p><b>Raised Font with 135mm Extension</b></p>  <p><b>Font with 135mm Extension</b></p> 	
 <p>Air outlet louvre (if required) Cut-out in door/wall, towards the top of the cabinet</p> <p>Air inlet cut-out (required) Cut-out in cabinet floor</p>	<p><b>Tap Positioning</b> Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).</p> <p>35mm hole for HydroTap Tap</p> 	<p><b>Cutting detail</b></p> <p>Raised Font: 108mm hole for bowl, 35mm hole for tap, 164mm diameter, 152mm height.</p> <p>Font: 108mm hole for bowl, 35mm hole for tap, 219mm diameter, 104mm height.</p>	



**HydroTap G5 B Home, BA Home**  
shown with "Classic Plus" Tap

SCALE 1:5  
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.