



HYDROTAP G5 BA ELITE PLUS BRUSHED NICKEL



BOILING



AMBIENT

FILTERED

Order Code H5E785Z11AU

Zip HydroTap Design Range Boiling, Ambient, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, and 0.2 micron water filtration.



Manufacturing Code H5E785Z11AU

Capacity Residential





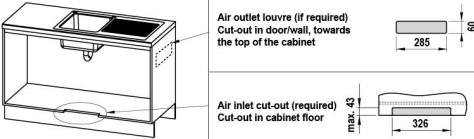




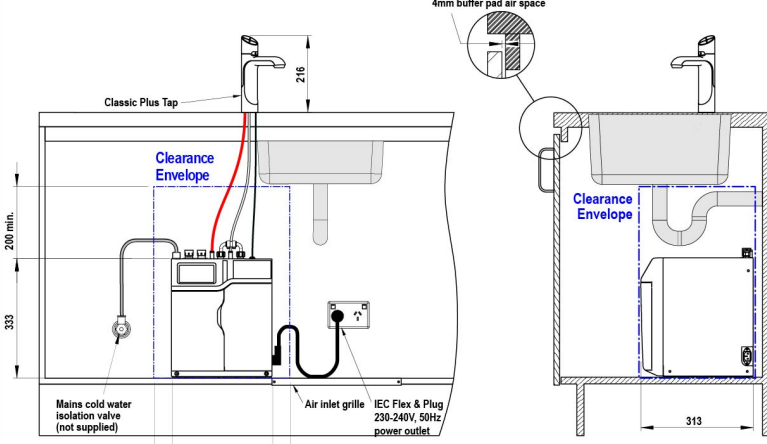
| | |
|----------------------------------|--|
| Tap | Zip HydroTap Design Range ELITE PLUS Tap (Brushed Nickel) |
| Water Pressure | Min 250kPa - Max 700kPa |
| Water Connection | 1/2" BSP (G1/2) |
| Water Supply Requirements | Cold |
| Water Valves | Integrated 500kPa Pressure limiting valve and Dual Check Valve |
| Power Rating | 1.35kW 220-240V 50Hz |
| Power Supply | 1 x 10 Amp socket outlet |
| Dimensions | W280mm x D313mm x H333mm |
| Product Approvals | WaterMark, RCM, ARC |
| Warranty | 5 years (appliance warranty 36 months plus additional 24 months tank warranty) |

Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
3. Zip Micro is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Installation Detail

BKL2 HydroTap G5 v1.00 02.21 B, BA

| Ventilation requirements <small>Contact your local service provider if ventilation is not suitable</small> | HydroTap Tap options | Font options | |
|--|--|---|---|
| <p>Clearance envelope Position the Tap and the Command Centre as close together as possible.</p>  | <p>Classic Plus Elite Plus</p>  | <p>Raised Font with 135mm Extension</p>  | <p>Font with 135mm Extension</p>  |
| <p>Air outlet louvre (if required) Cut-out in door/wall, towards the top of the cabinet</p>  <p>Air inlet cut-out (required) Cut-out in cabinet floor</p>  | <p>Tap Positioning Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).</p> <p>35mm hole for HydroTap Tap</p>  | <p>Cutting detail</p>  | <p>Cutting detail</p>  |
| <p>4mm buffer pad air space</p>  <p>SCALE 1:5 ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.</p> | | | |

**HydroTap G5
B Home, BA Home**
shown with "Classic Plus" Tap