

KSHU771XAU

Product family	Hood
Hood Type	Integrated hood
Design	Ceiling
Extraction	Recirculation
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709364076
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin



Controls

Control setting	Buttons
-----------------	---------

Program / Functions

No. of speeds	3
Intensive speed	

Technical Features

			
No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Stainless steel
Light Power	1,1 W	Vent outlet	150 mm
Light color temperature scale (K)	4000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	780 m³/h	Minimum distance from ELECTRIC hob	550 mm
Motor power	230 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	277	46
Speed 2	367	53
Speed 3	481	59


Intensive speed	721	68
-----------------	-----	----

Accessories included

Tube reduction Yes

Electrical Connection

Current	10 A	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	(I) Australia
Frequency (Hz)	50-60 Hz		

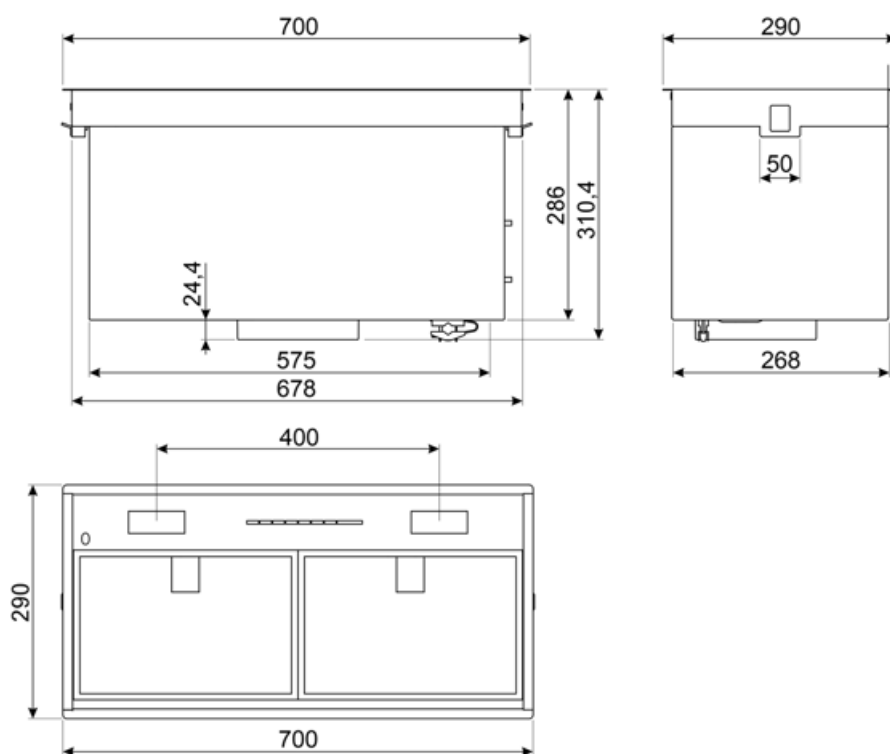

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.