

KIR37N2



Product family	Hood
Hood Type	Decorative island hood
Design	Cylindric
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless Steel + Painted Material
Type of steel	Brushed
EAN code	8017709346096
Hood width	37 cm



Aesthetics

Aesthetic	Universale	Serigraphy colour	Black
Colour	Black	Logo	Silk screen
Finishing	Satin		





Controls

Control setting	Electronic buttons	Led color	White
------------------------	--------------------	------------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
Other functions	Delay_function

Technical Features

					
No. of lights	2	No. of filters	1		
Light type	LED	Anti-grease filters	Aluminium		
Light Power	1 W	Filter replacement indicator	Yes		
Dimmer mode	Yes	Vent outlet	150 mm		
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	550 mm		

Free outlet maximum capacity	720 m ³ /h	Minimum distance from ELECTRIC hob	550 mm
Motor power	250 W		

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	280	48
Speed 2	400	56
Speed 3	570	65
Intensive speed	700	69

Accessories Included

Tube reduction	Yes
----------------	-----

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	54 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dBA
Fluid Dynamic Efficiency (FDE)	29,6	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	114 lux/W	Energy Efficiency Index	51,9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	380 m ³ /h
Grease Filtering Efficiency (GFE)	85,1 %	Measured air pressure at best efficiency point (Pbep)	448 Pa
Grease Filtering Efficiency Class (GFEC)	B	Measured electric power input at best efficiency point (Wbep)	160 W
Air flow at minumum speed (Qmin)	280 m ³ /h	Nominal Power consumption of the light system (WL)	2.2 W
Air flow at maximum speed (Qmax)	570 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	250 lux
Air flow at boost speed (Qboost)	700 m ³ /h	Sound power level at highest setting (Lwa)	65 dBA
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA		

Electrical Connection

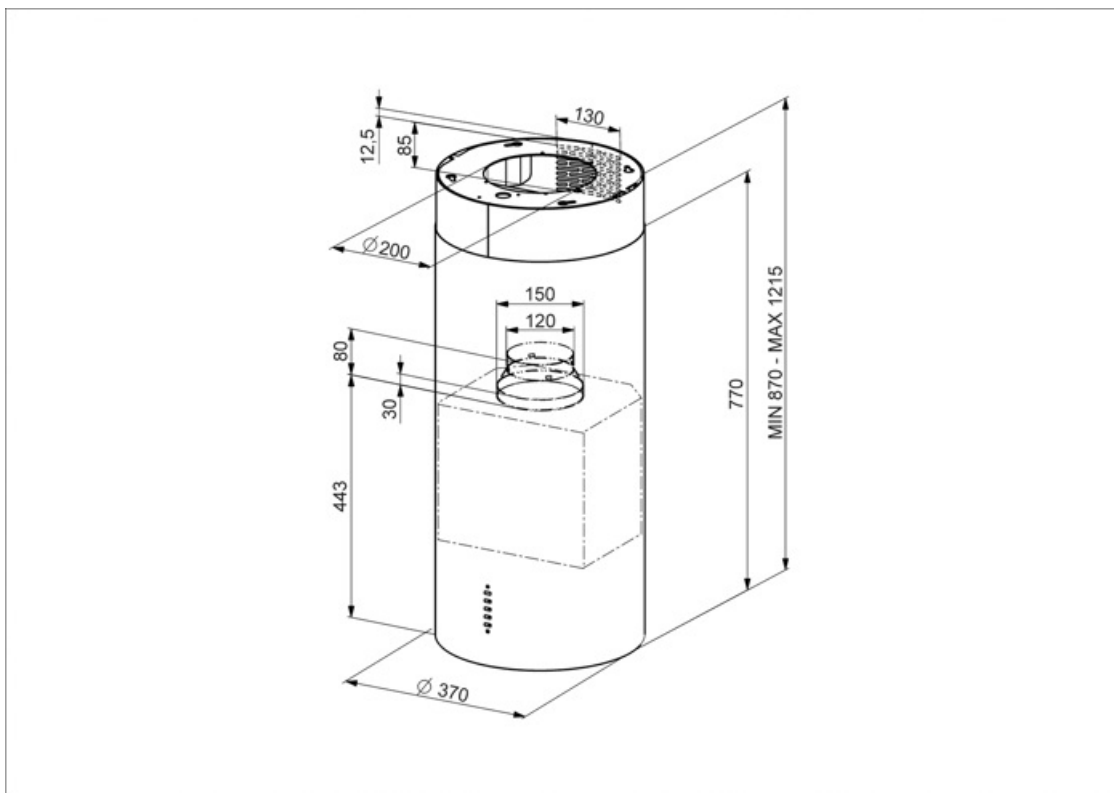
Electrical connection rating	252 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

Also available

Alternative colours available Stainless steel

Optional accessories

Charcoal filter



Not included accessories



KITFC161








Charcoal filters Kit 2 pieces



KITVENT150

Imbocco motore 150 mm con valvola di non ritorno

Symbols glossary

- | | | | |
|--|--|---|---|
|  | A: Product drying performance, measured from A+++ to D / G depending on the product family |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Perimeter extraction panels: very efficient and aid noise reduction. |  | Intensive/turbo setting: when extra fast extraction is required. |
|  | ... | | |